

Most Reliable

# Smart Wireless Alarm



Connect your home security to internet








DIY Alarm

24 Hours Protection
Wireless Technology

## MODEL



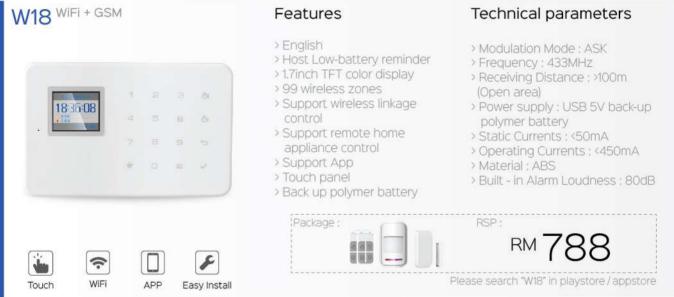



# **ACCESSORIES**

A-MS / A-MSR

#### Wireless Magnetic Detector

- > High quality with shining ABS Material
- > Quality stable and reliable
- > Exquisite fashion design, mild surface
- > Built- in high- performance all-directional antenna
- > Frequency: 433MHz
- > Receiving Distance: >100m (open area)
- > Low Voltage Prompt: LED flash consistently



A-MS A-MSR RSP: RM 68 RSP: RM 78





#### A-PIRC

## Wireless PIR ceiling Detector

- > Internal battery: DC 9V 6F22
- > Alarm current: ≤ 20mA
- > Detection range: 8- 12 meters / 110 degrees
- > Wireless distance: 300 meters in
- > Wireless transmitting frequency: 433 MHZ / 868 MHZ (+ 75 KHZ)
- > Shell material: ABS plastics



RSP: RM 126



#### A-WKB

#### Ultra Slim Wireless Keypad

- > Host low-voltage prompt
- > Tamper design
- > RFID swipe card function
- > Touch screen control operation



RSP: RM 268







#### A-IS

#### Multi-function Wireless Siren

- > Memory function
- > 110dB alarm sound
- > AC/DC
- > As wireless siren



RSP: RM 158









#### A-SD

#### Smoke Detector

- > The volume: ≥ 80dD
- > Battery life: Carbon-zinc batteries about 1 year
- > Alkaline batteries about 3 years
- > Execution standard: Gb4715- 2005
- > Weight: about 135g (include battery)



#### A-VB

#### Wireless Vibration Detector

- > Power: DC 12V(12V23A Battery)
- > Standby Currents: Less than 25uA
- > Alarm Current: Less than 20mA
- > Case Material: ABS Plastics
- > Operating Temperature: -10-55 degrees
- Operating Temperature: Than 80% (No Coagulation)
- Wireless Transmitting Freque 315MHz/433MHz(75KHz)
- Wireless Transmitting Distance Less Than 80m (open area/nor interfering)



RSP: RM 118



#### A-TS

## Temperature & **Humidity Sensor**

- > Range of temperature and humidity is adjustable.
- Temperature measure unit can be set in Fahrenheit (F) or Celsius (°c)
- > Send alarm signals to the appropriate host when ala
- > Can connect with external temperature sensors, temperature probes can detect the temperature out of the environment



RSP: RM 178









#### IP Camera Alarm System

A-WPTC

A-FS

Wireless Outdoor

Strobe Siren

Away from the wall tamper opening the lid tamper,Flash about 65 times per minute

> Rated Current: 300mA

> Strobe Siren with Backup Battery

> LED Color: Red, blue and others > Size: 210\*130\*65mm

- > Support APP
- > 99 wireless zones
- > Support wireless linkage control
- > Mobile touch control or compute
- > Short range and remote
- > Monitor and video > WiFI/On-line Alarm



RSP: RM 428



RSP: RM 228

8





A-ESS

A-PIR Wireless PIR Detector

with Built-In Antenna

> External adapter: DC5V

> Alarm current: ≤ 20mA

> Internal battery: 3 AAA battery

> Wireless distance: ≥150 meters (open area/no interference)

Wireless transmitting frequency 315 MHZ / 433 MHZ (+ 75 KHZ)

> Shell material: ABS plastics

Take-along

> Can hang on

> Detector size: 106 x 65 x 44 mm

**Emergency Button** 

> Dazzling blue LED light prompt

A-PBR

A-SHPS

WiFi Smart Socket

> Remote control home appliance

> Built-in Super memory function

>Unique design

> Detection range: 6-12 meters / 110 degrees

## Solar Strobe Siren

- > Solar recharge battery
- > Low battery indication
- > Anti-tamper Alarm > Support wired linkage alarm
- > Four alarm voice adjustable
- > 8 level alarm volume adjustable



RSP: RM 388

RSP: RM 118

RSP:RM 58

RSP: RM 98

#1

11

11







A-RCR

## Remote Control

- > Build- in omnidirectional antenna
- > Working Voltage: 12VDC; AG23
- > Wireless Frequency: 315 MHZ /433MHz
- > Current: 15 mA
- > Coded IC: 1527



RSP: RM 148



- > Power supply: DV9V
- > Output form: sound alarming
- - RSP: RM 98



- Double antenna transceiver, the signal can cover 1000 m range
- > The built-in high quality voice chip all the voice prompt operation process
- Can be used as a field alarm, flexible and convenient



RSP: RM 358



# **Features**

